



HeadLok™

HEAVY DUTY FLATHEAD FASTENER

The HeadLok is a specialized, flathead fastener engineered for a wide range of panel applications including:

- Structural Insulated Panels
- Prefabricated Wall Panels
- Nailboard

HeadLok Fastener Benefits:

- Three point styles available for fast installation into wood, corrugated steel and structural steel substrates.
- Aggressive thread for holding power and withdrawal strength.
- Chamfer under head for increased strength.
- Extra large wafer head dramatically increases pull-through resistance and eliminates the need for additional washers.

Introducing the Spider™ Drive

Patent pending drive system developed especially for the HeadLok. The eight-lobed design offers the highest level of positive bit engagement and drivability.

5 free driver bits are included in every package.

Installation


- Install HeadLok using a high torque, low rpm, corded or 18 volt cordless drill.
- Bring underside of washer head flat to surface.
- Do not overdrive.
- No pre-drilling required.

ACQ Tested and approved

Call OMG for free samples or additional information. 1-800-633-3800.



153 BOWLES ROAD
 AGAWAM, MA 01001-3824
 413-789-0252
 FAX: 413-789-1069
 www.olyfast.com

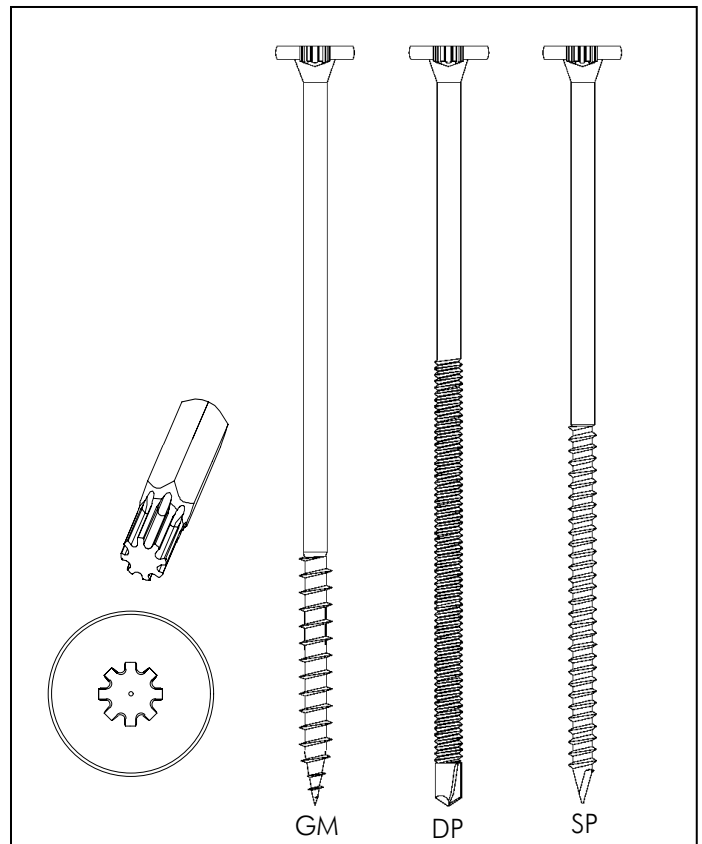

SKU	LENGTH	QTY	Available Point Styles		
			GM	DP	SP
FMHL**158-500	1 5/8"	500			SP
FMHL**278-500	2 7/8"	500	GM		SP
FMHL**003-250	3"	250			SP
FMHL**312-250	3 1/2"	250			SP
FMHL**004-250	4"	250			SP
FMHL**412-250	4 1/2"	250	GM		SP
FMHL**05-250	5"	250			SP
FMHL**512-250	5 1/2"	250			SP
FMHL**006-250	6"	250	GM	DP	SP
FMHL**612-250	6 1/2"	250	GM		SP
FMHL**007-250	7"	250	GM		SP
FMHL**712-250	7 1/2"	250	GM		SP
FMHL**008-250	8"	250	GM	DP	SP
FMHL**812-250	8 1/2"	250	GM		
FMHL**009-250	9"	250	GM		
FMHL**912-250	9 1/2"	250	GM		
FMHL**010-250	10"	250	GM	DP	SP
FMHL**011-250	11"	250	GM		
FMHL**012-250	12"	250	GM	DP	SP
FMHL**013-250	13"	250	GM		
FMHL**014-250	14"	250	GM	DP	
FMHL**015-250	15"	250	GM		
FMHL**016-250	16"	250	GM		
FMHL**014-250	18"	250	GM		

Replace ** with two letter code for point style

Point Style	Code	Application
Gimlet Point	GM	Wood Only
Drill Point	DP	14 Gauge - 1/4" Steel
Spade Point	SP	Wood, 18-24 Gauge Steel